


1/17


Fig. 1

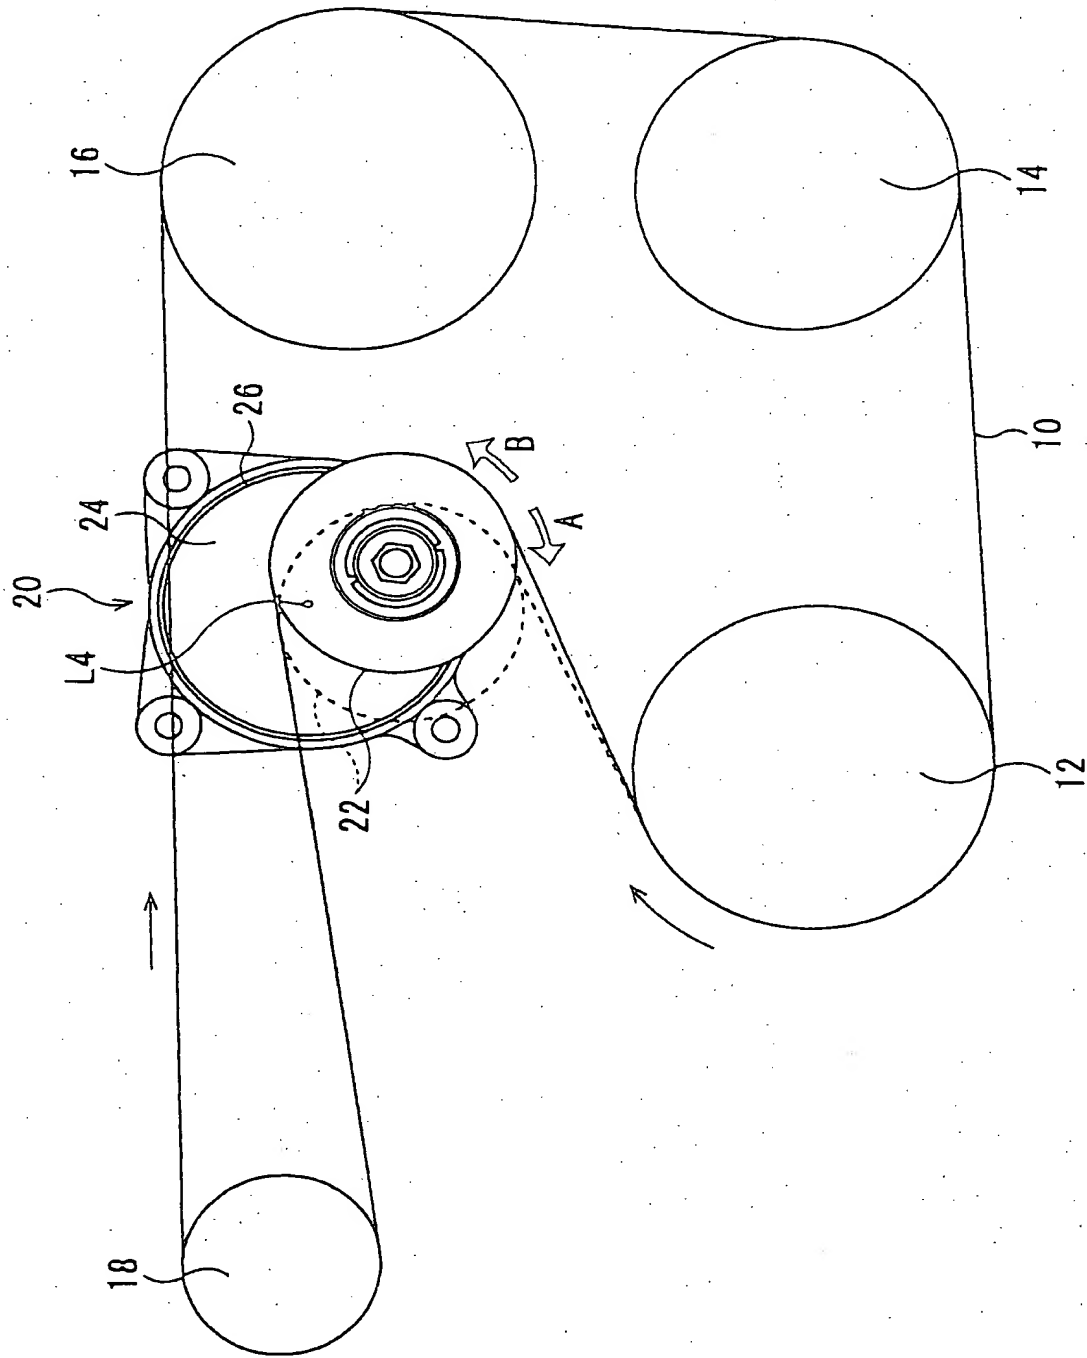

T05260" SET 9660

2/17


Fig. 2

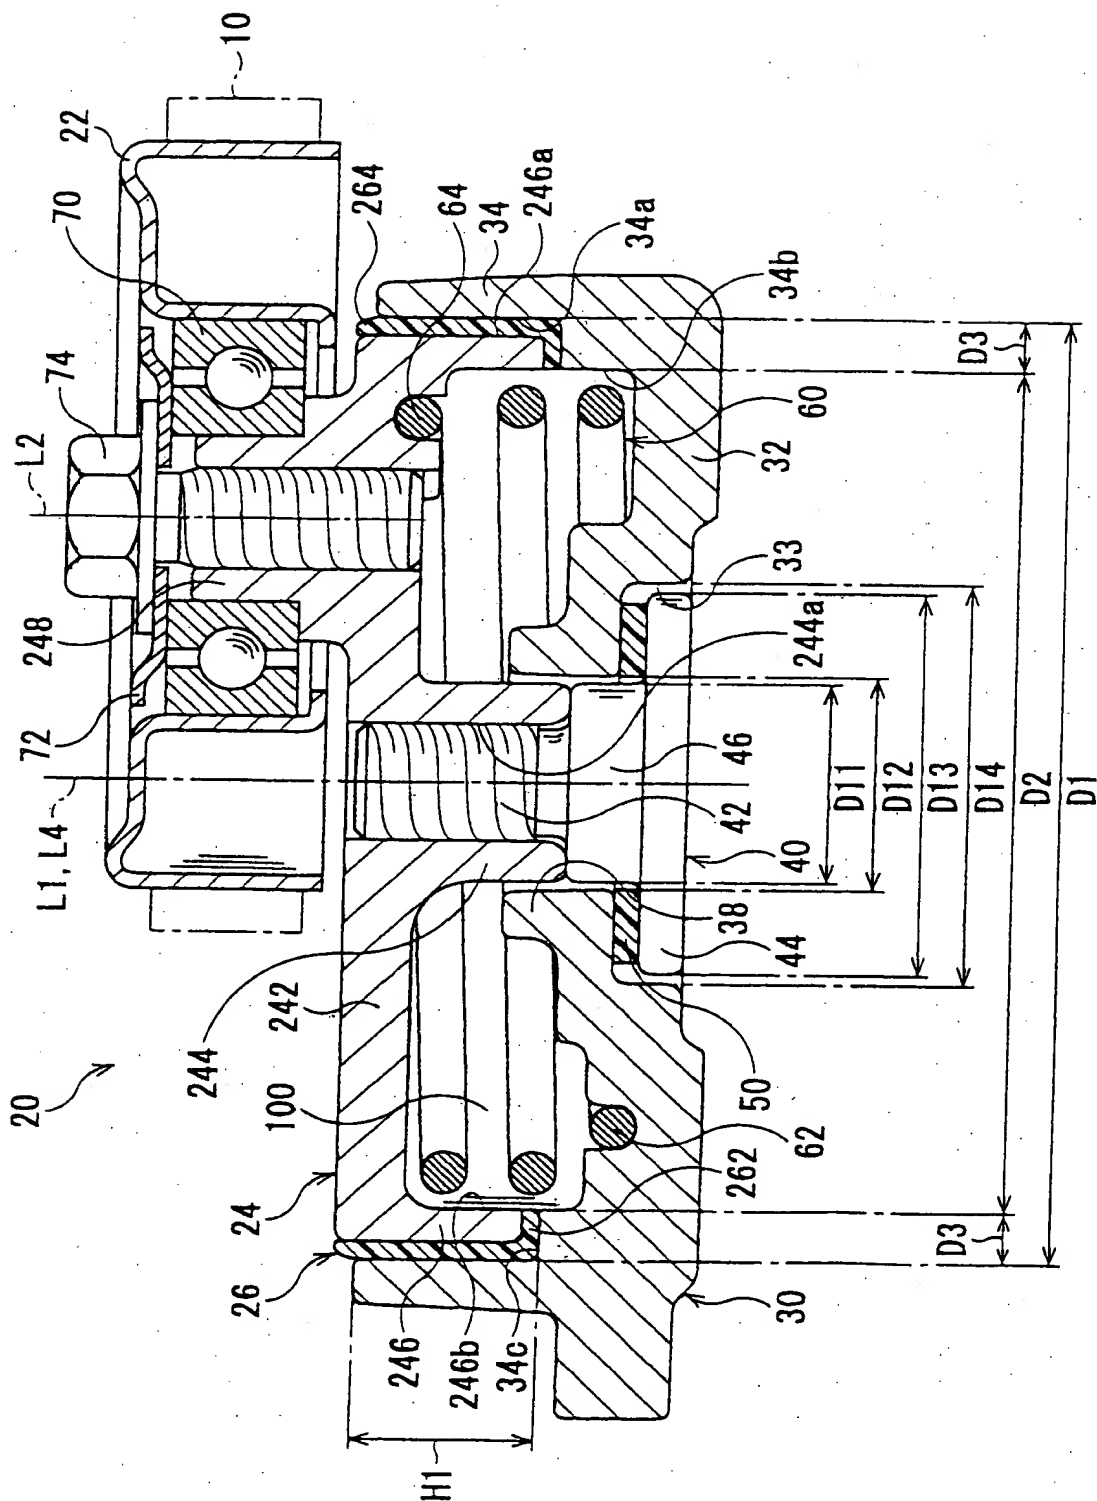

105260" S9ET9660

3/17


Fig. 3

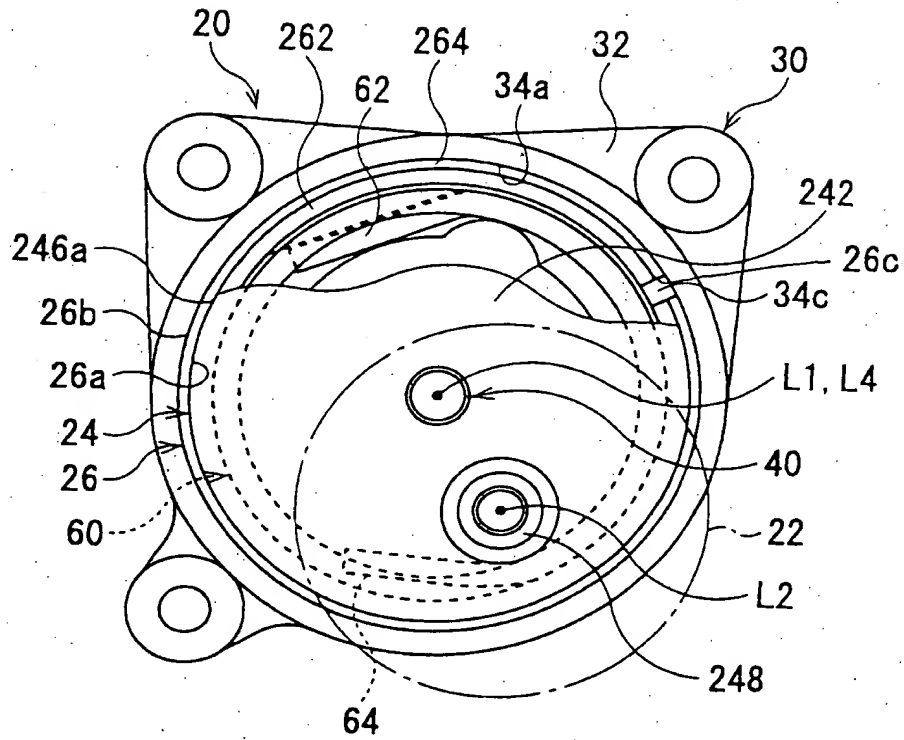

0961365-092501


4/17

Fig. 4

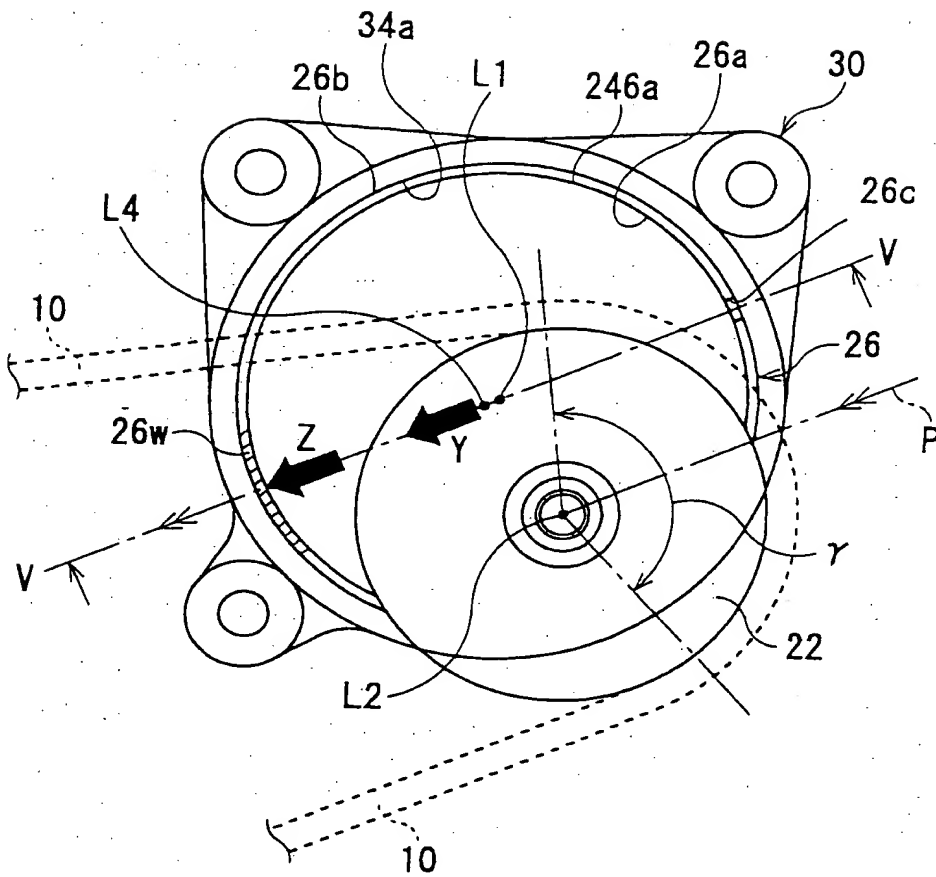

09961365-092501

Fig. 5

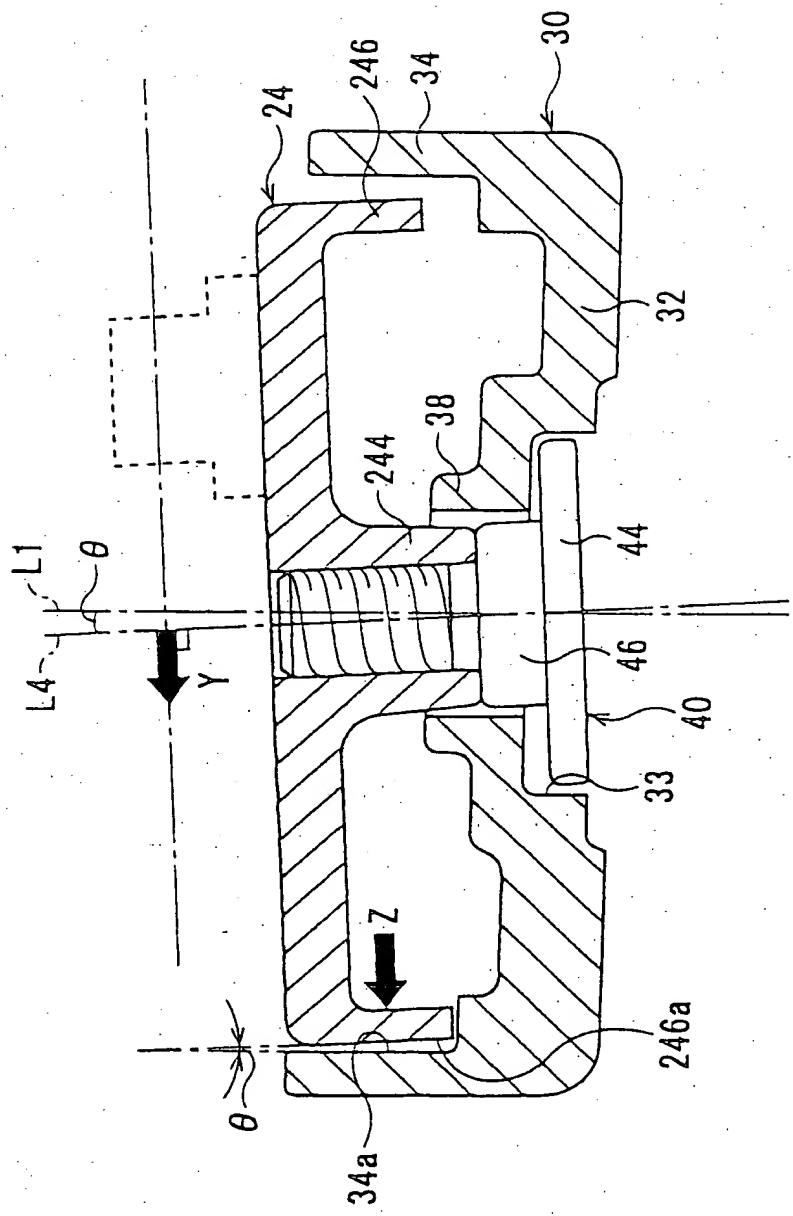

105260*59ET9660

6/17
Fig. 6


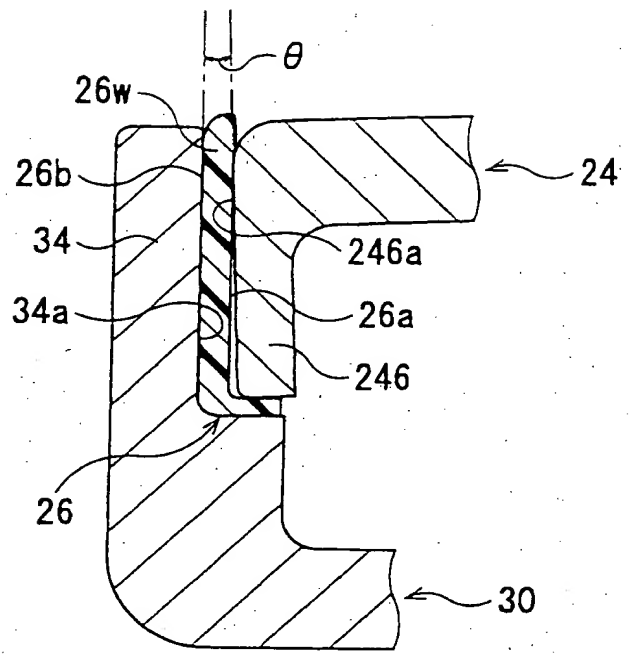



Fig. 7

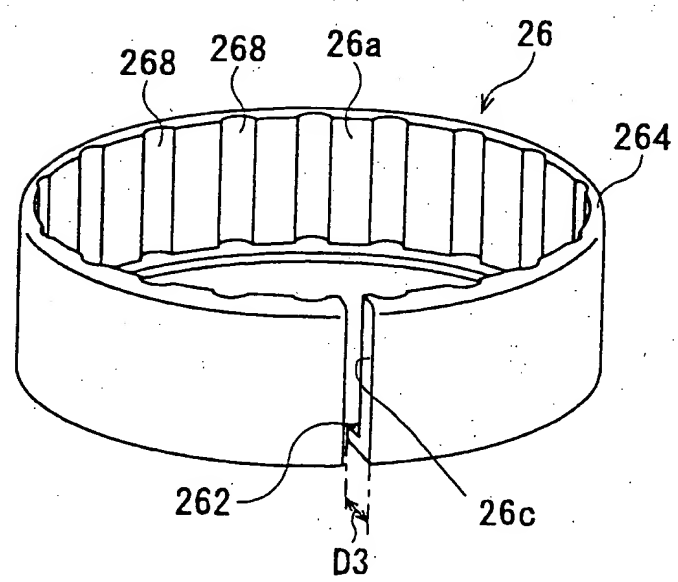

09961365.092501

7/17


Fig. 8

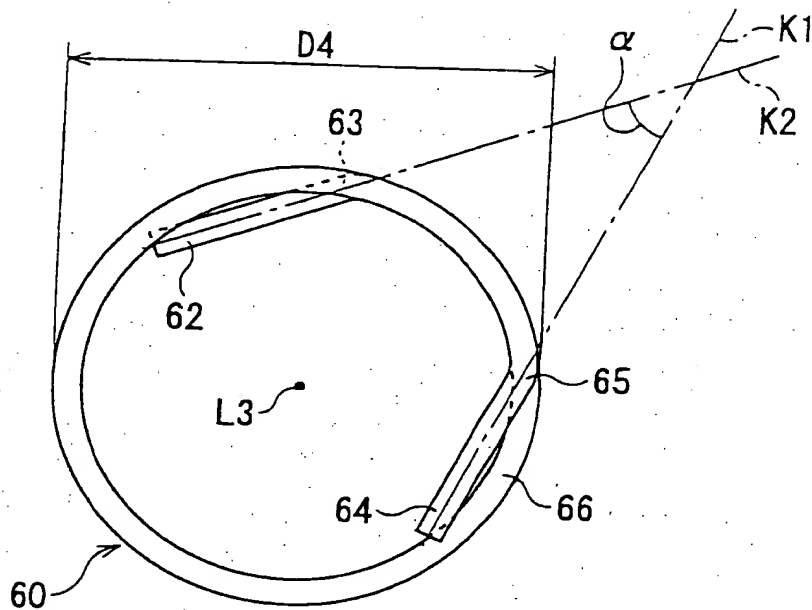

09961365.092501

8/17


Fig. 9

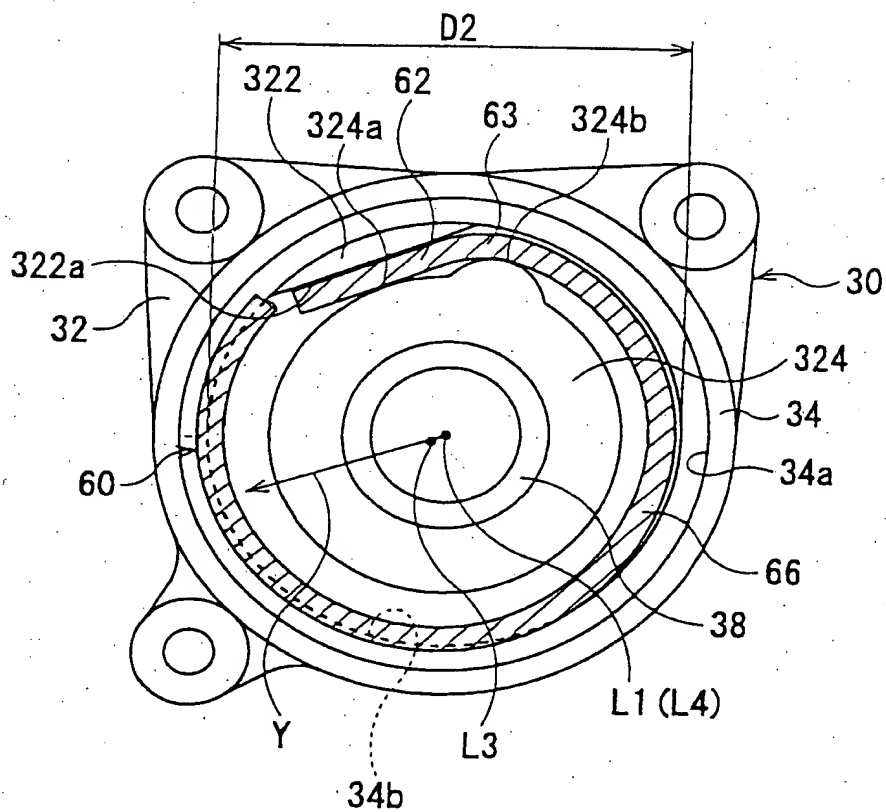

09961365, 092501

9/17


Fig. 10

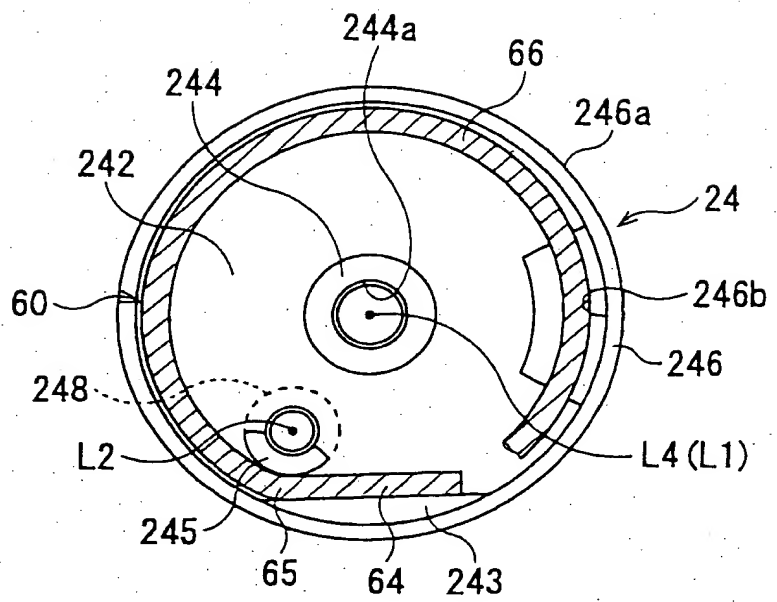

09961365-092501

10/17


Fig. 11

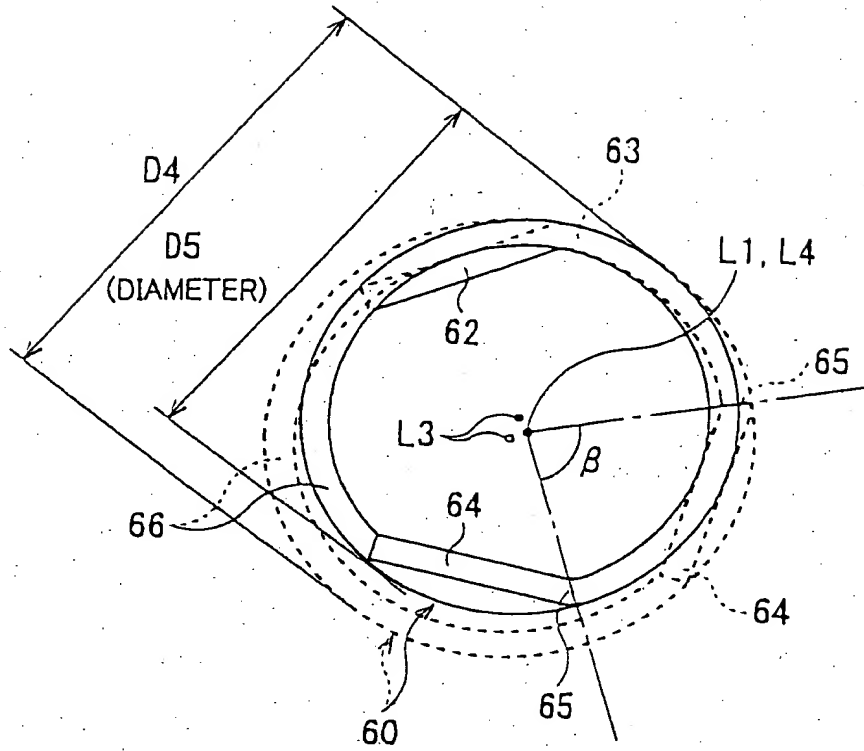

105260-59E19660


11/17

Fig. 12a

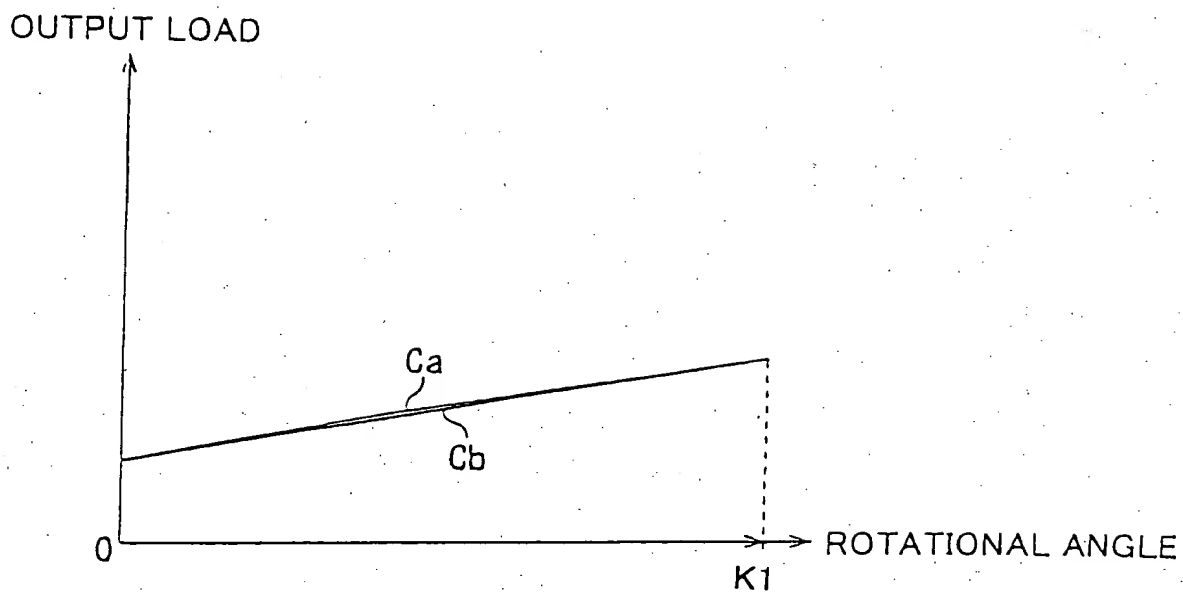

TORSION COIL SPRING ALONE

Fig. 12b

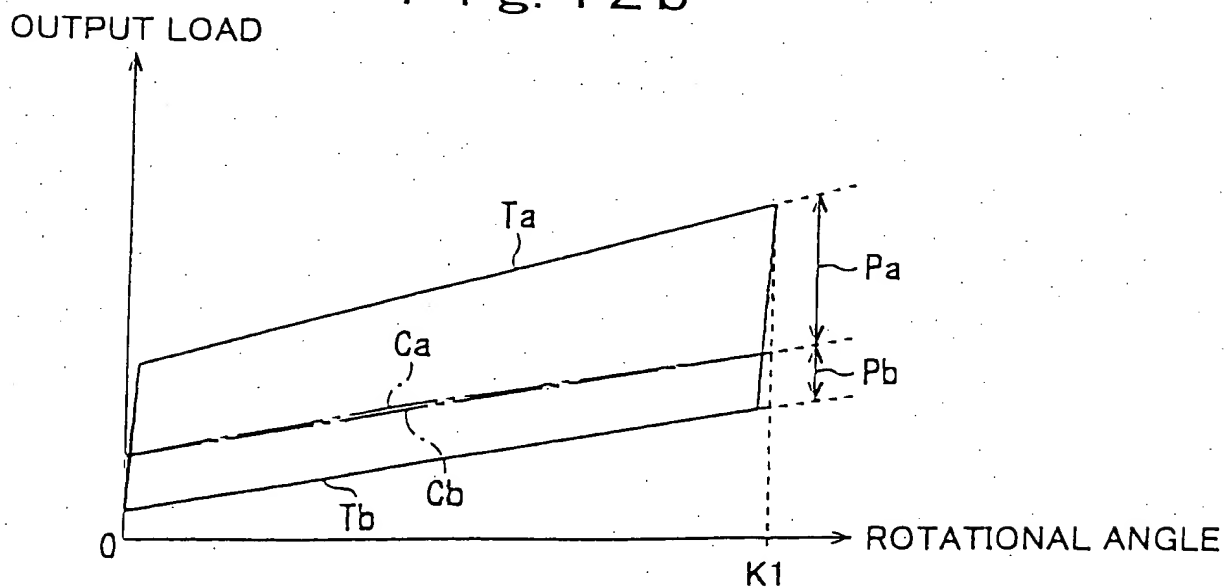

TORSION COIL SPRING + BUSHING

09964365-092501
105260-592501

12/17
Fig. 13


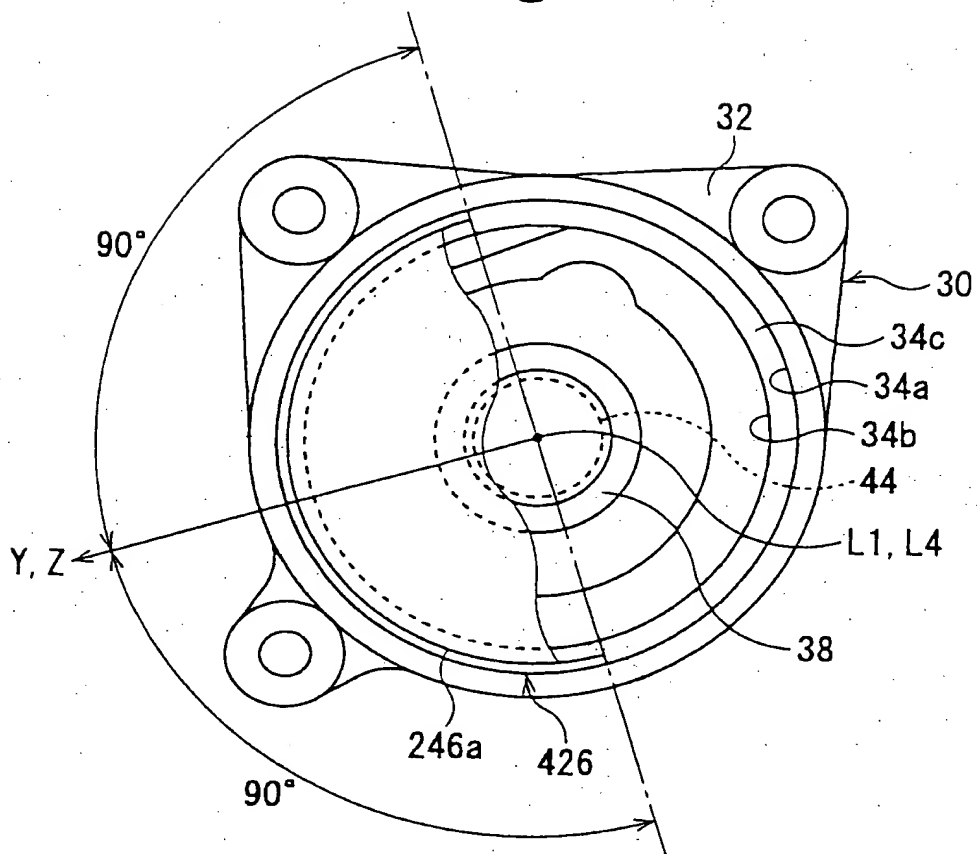


Fig. 14

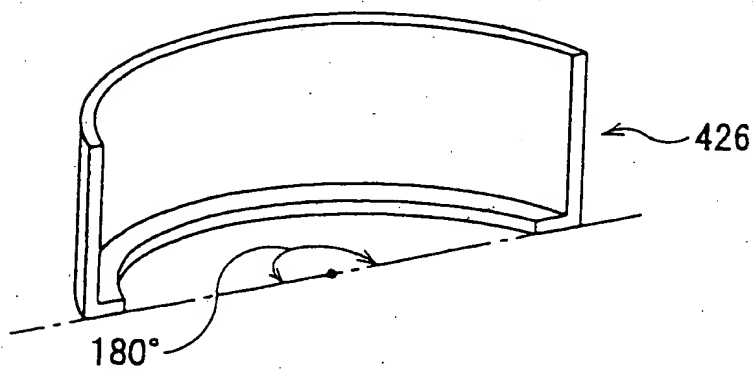

09961365.092501

13/17

Fig. 15


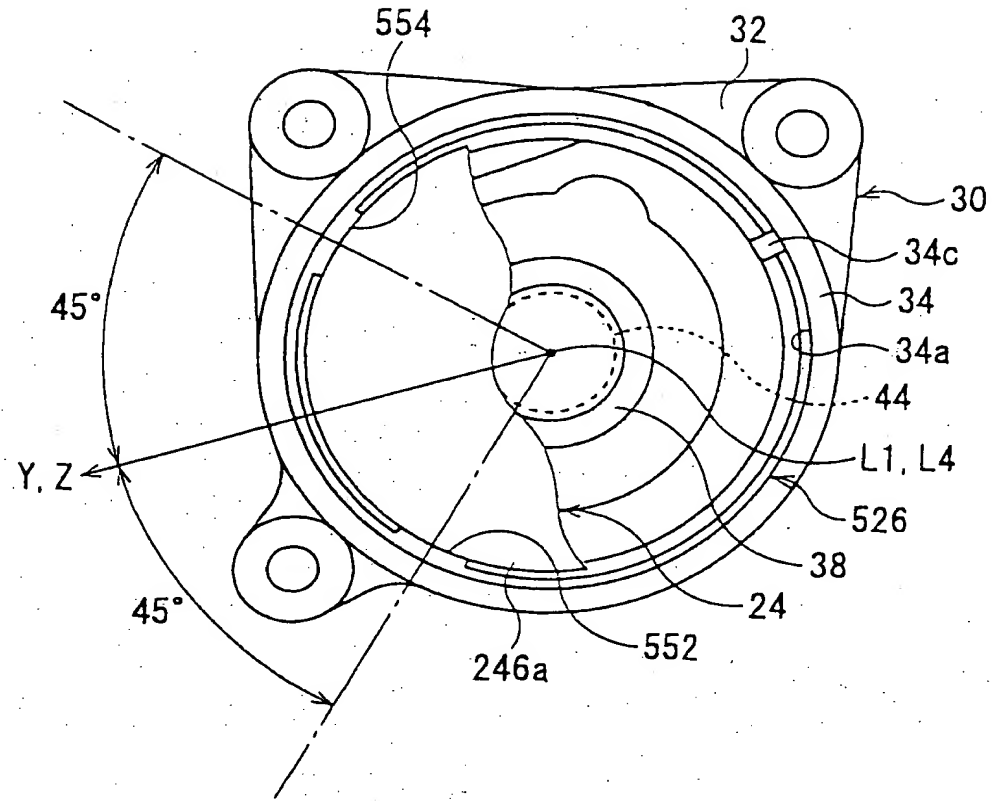



Fig. 16

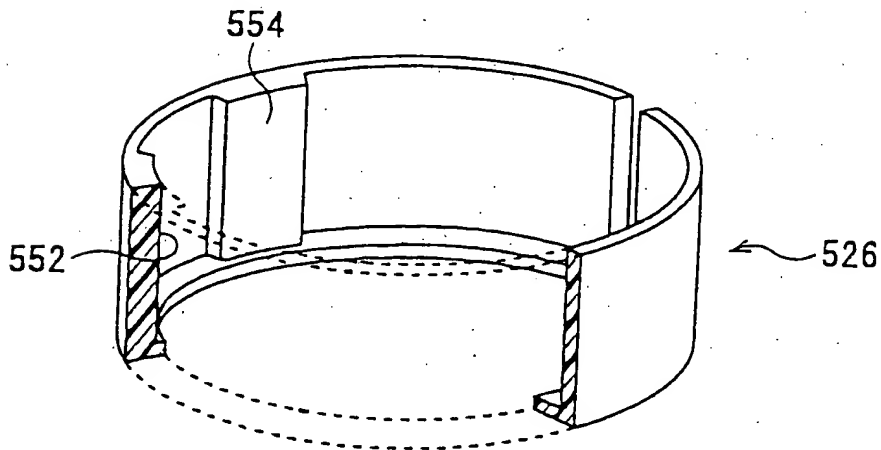

0961365-0501

14/17

Fig. 17

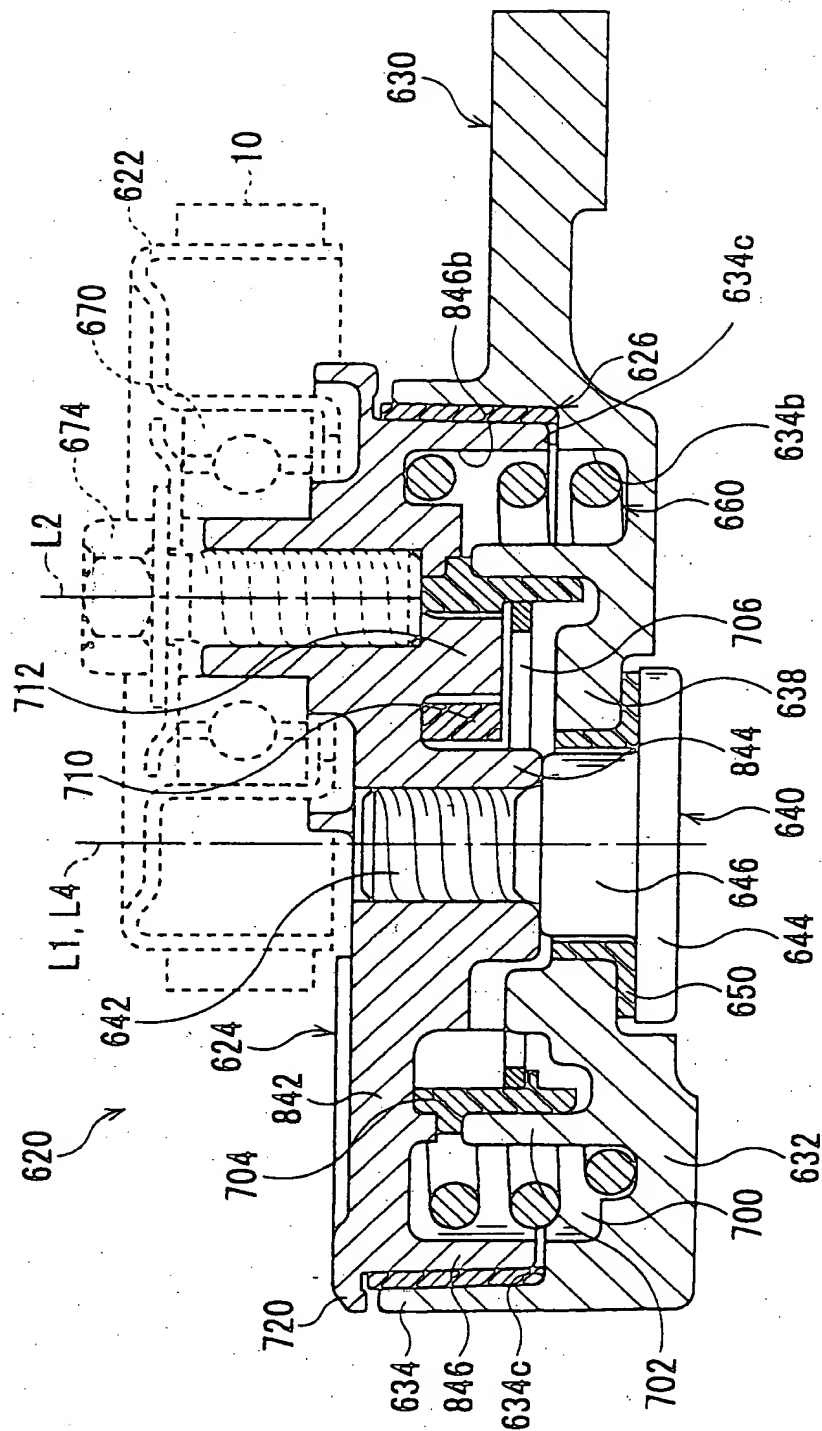

15/17

Fig. 18


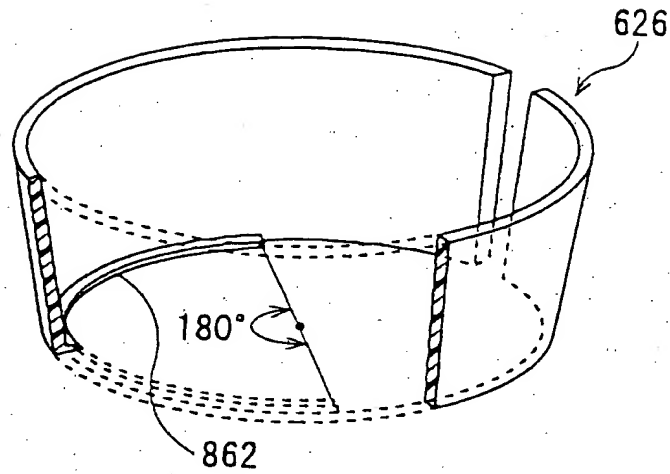


Fig. 19

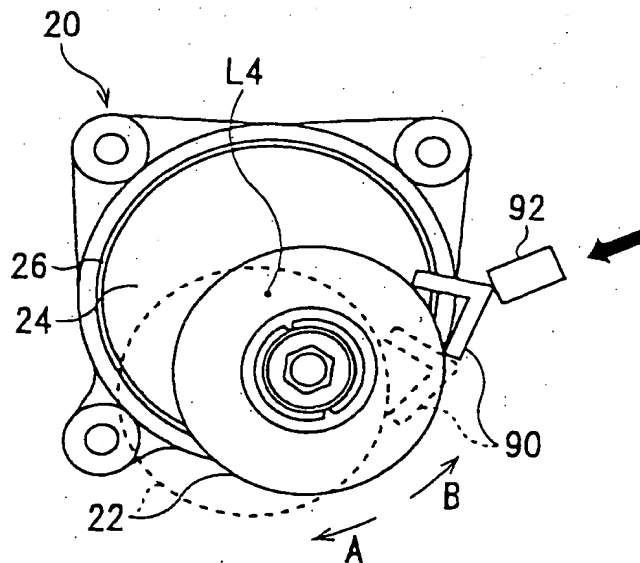


09961355 092501
T05260" 59ET9660

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

16/17

Fig. 20

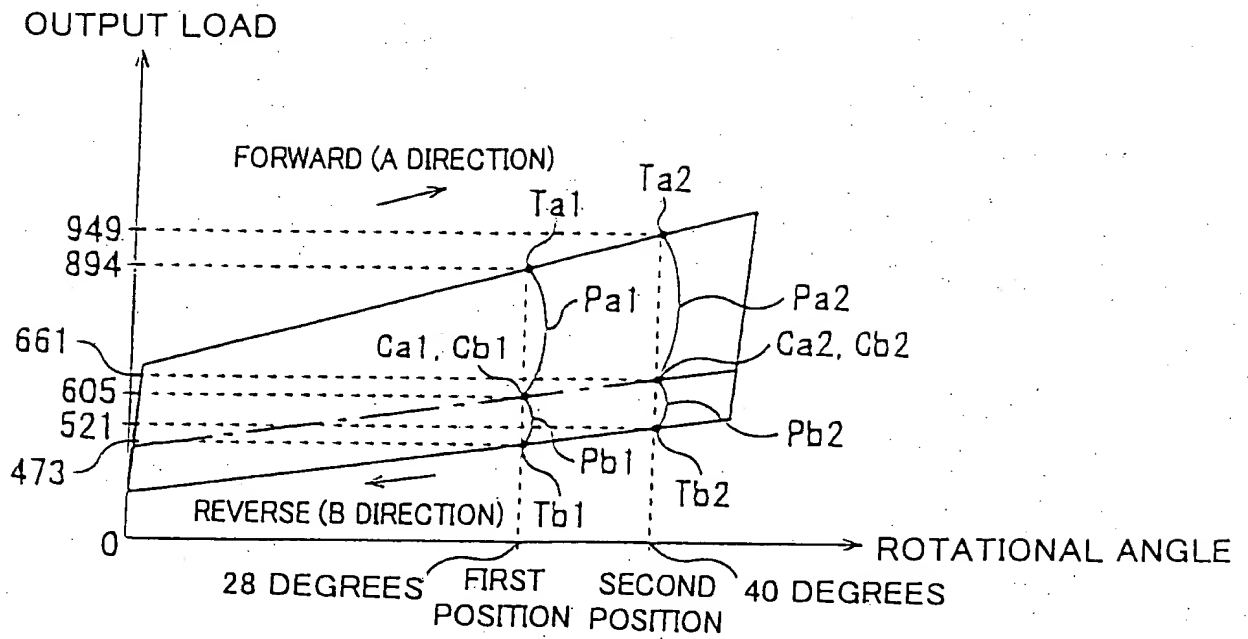


005260" 59ET9660

17/17

Fig. 21

WATER SPRAYING TEST RESULTS

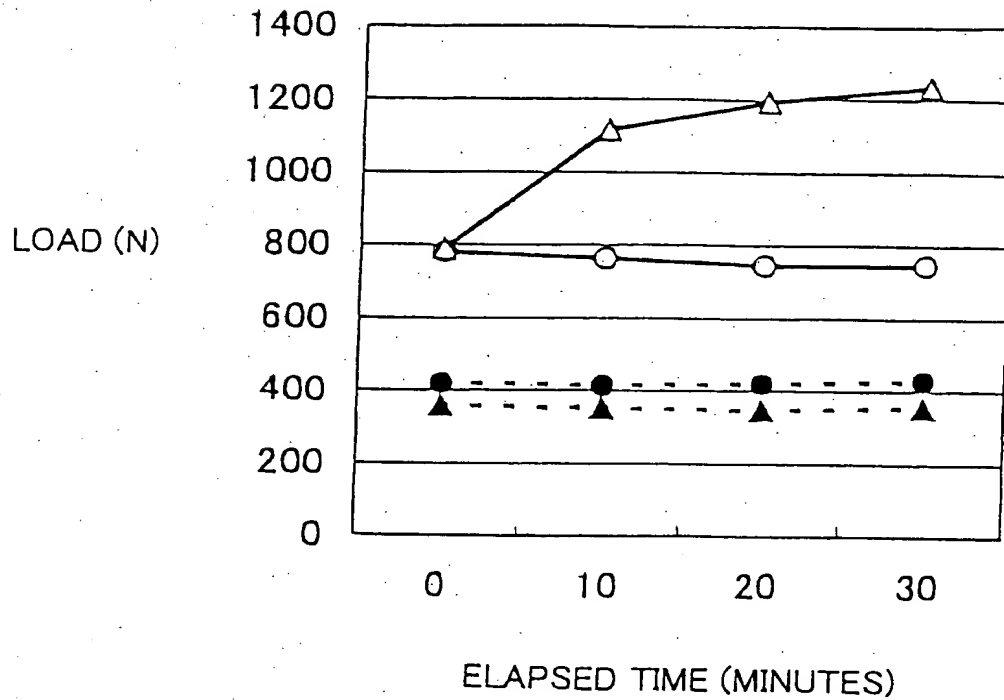

- EXAMPLE OF INVENTION (FORWARD OPERATION LOAD)
- EXAMPLE OF INVENTION (REVERSE OPERATION LOAD)
- △— COMPARATIVE EXAMPLE (FORWARD OPERATION LOAD)
- ▲--- COMPARATIVE EXAMPLE (REVERSE OPERATION LOAD)

0961365.092501